



**Model 6640** The high vacuum suction carries the crop on a pillow of air and aids in cleaning out trash particles as the crop goes through the grain vac. The versatility of the grain vac hoses and cleanup wands allow the operator to access hard-to-reach areas for superior cleaning. The optional self-contained hydraulics allow the grain vac to be fully operational without using the hydraulic ports of the tractor.

**PRODUCT OVERVIEW**

- › A simpler, safer and more efficient way to move grain
- › 110 hp required

**FEATURES**

- › Quick connect couplers
- › Silencer
- › High capacity airlock and blower

**OPTIONS**

- › Self-contained hydraulics
- › Dual inlet receiver tank

MODEL	6640
Suction	6" (15.24 cm)
Discharge	6" (15.24 cm)
Length	99" (252 cm)
Width	93" (236 cm)
Transport height (standard boom)	98" (249 cm)
Boom discharge height (standard)*	12' (3.7 m)
PTO speed	1000 RPM
Recommended hp	110 hp

\* Tall boom available.




**[1] Transport** - Standard hose kit, suction, nozzles and hydraulic boom all store on the unit for transport, making it easy for the operator to setup and begin using the machine. **[2] Ease of Operation** - The self-storing boom is hydraulically put into position, eliminating the need for boom assembly. **[3] Healthier, Safer Option** - The Farm King grain vac virtually eliminates dust in the air caused from moving grain making it a healthier, safer option. The low-profile cleanup wand is designed to reduce operator strain. **[4] Speed** - Move grain fast with capacities ranging from 2800 bushels per hour to 4000 bushels per hour depending upon grain.

**Hoses and Wands**

Many hoses and wands are available to meet your unique operation requirements.

**Grain Vac Uses**

The Farm King Grain Vac is capable of several setups such as truck to bin, bin to truck and bin to bin.

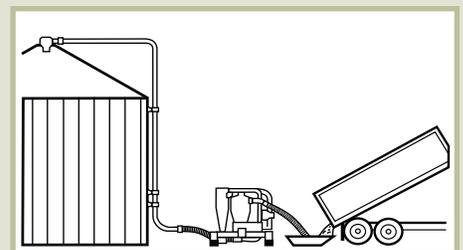

Truck to bin